


# ALZAPRIMAS

FUNCIONABILIDAD DE ALZAPRIMAS  
 ✉ VENTAS@MANUMETAL.CL




## ISOMETRICAS TIPO

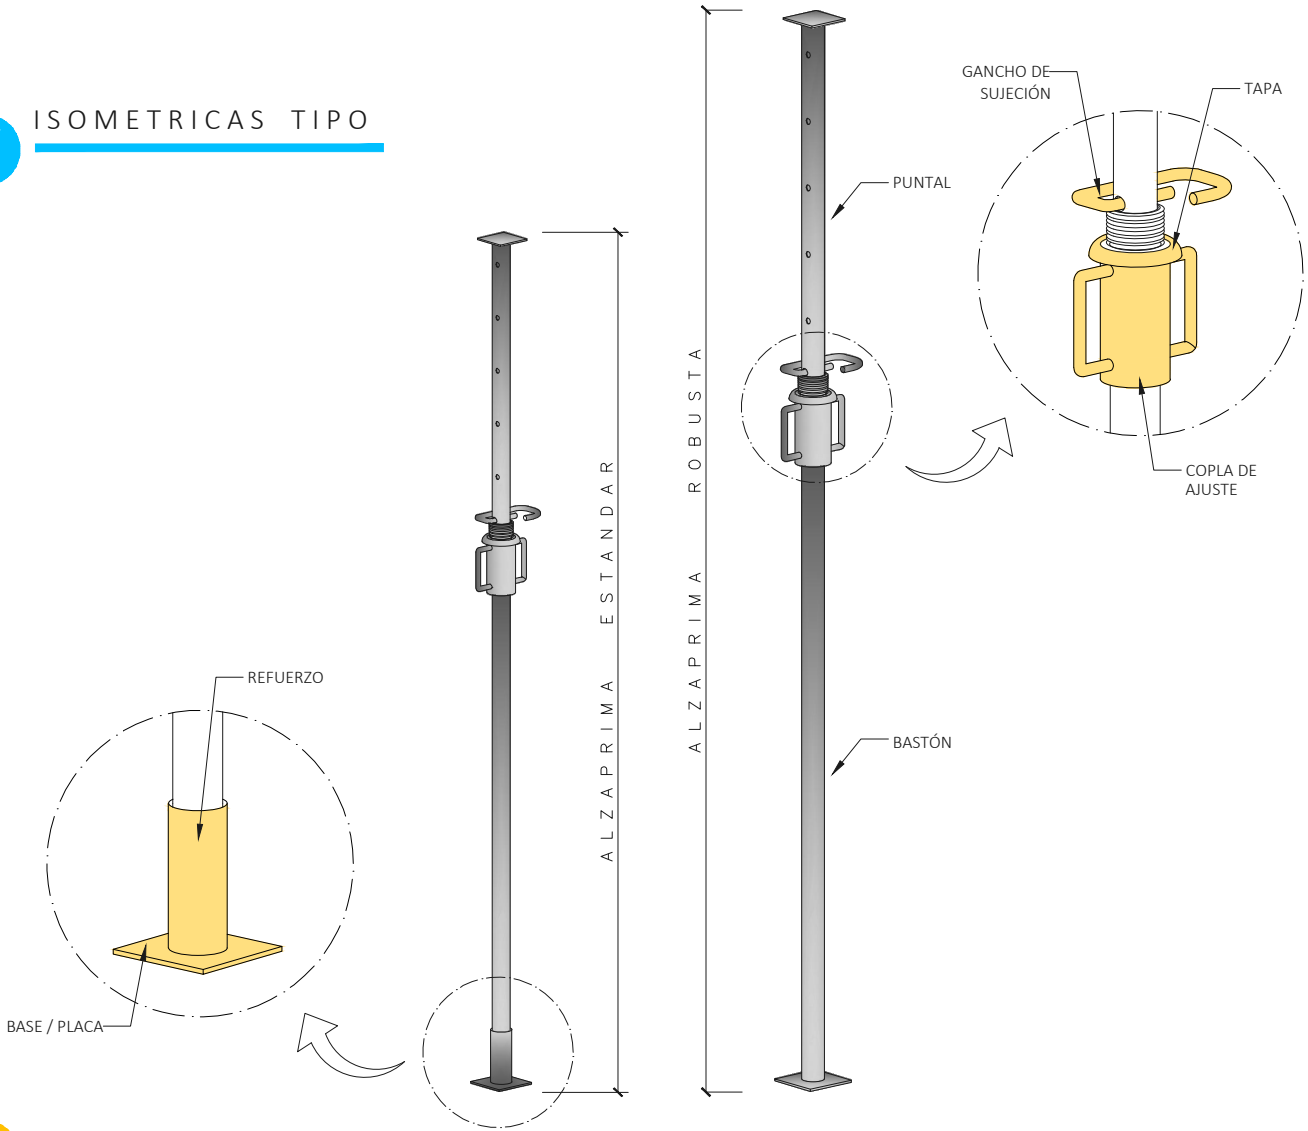

## CUADRO TECNICO

ALZAPRIMAS								
COD	DESCRIPCION	ALTURA	ALTURA	TUBO	TUBO	PESO	CARGA ADMISIBLE	TERMINACION
		MINIMA	MAXIMA	INTERIOR	EXTERIOR			
		(mts)	(mts)	(mm)	(mm)	(Kg)	(Kgf)	PINTADO
AL00	ALZAPRIMA DE 1 MTS	0.60	1.00	42	50	4.6	1000	x
AL01	ALZAPRIMA DE 2.85 MTS	1.50	2.85	42	50	8.9	1000	x
AL03	ALZAPRIMA DE 3.10 MTS	1.85	3.10	48	50	9.0	1000	x
AL04	ALZAPRIMA DE 3.35 MTS	2.00	3.35	42	50	10.0	1000	x
AL05	ALZAPRIMA DE 3.70 MTS	2.00	3.70	42	50	11.0	1500	x
AL16	ALZAPRIMA DE 4,50 MTS ROBUSTA	3.00	4.50	51	60	24.4	1500	x
AL07	ALZAPRIMA DE 5.50 MTS ROBUSTA	3.00	5.50	51	60	23.6	1500	x



- VALORES DE CARGAS SON OBTENIDOS MEDIANTE ENSAYOS DE FALLA CON FACTOR DE SEGURIDAD 3 PARA DETERMINAR CARGA ADMISIBLE PARA ALZAPRIMA SIMPLEMENTE APOYADA.



DEPARTAMENTO TECNICO ARRIMETAL S.A.  
 OFICINA COMERCIAL  
 📍 NUEVA DE LYON #145 OF 402, PROVIDENCIA, SANTIAGO.  
 ☎ FONO 223351037 / 223352949  
 ✉ WWW.MANUMETAL.CL